

# Product Data Sheet



## MrPEX® PEX-AL-PEX Tubing

MrPEX® PEX-AL-PEX tubing is a 5 layer composite pipe manufactured to ASTM F 1281-2005 (CSA B137.10).


Certified by NSF (NSF-rfh)

Temperature/pressure rated by the Hydrostatic Stress Board of PPI (Plastics Pipe Institute) in accordance with ASTM F 1281-2005 (CSA B137.10) to 160 psi at 200°F.

The tubing has an expansion coefficient almost 9 times less than regular PEX. Noise and movement after installation is virtually eliminated.

The tubing will stay in place after bending due to its aluminum core. This allows for a clean and professional looking installation. The tubing can be exposed to a bending radius approximately 5 times the actual outside diameter without kinking.

Aluminum core is 100% gas/oxygen tight

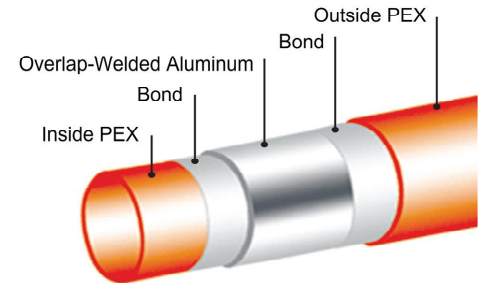

### ASTM F1281 TUBING SPEC

	OD	Wall	ID
1/2	0.630	0.065	0.500
5/8	0.787	0.075	0.637
3/4	0.984	0.089	0.806
1	1.260	0.118	1.024

### MrPEX® PEX-AL-PEX Tubing

Part Number	Description	Type	Unit
1320025	1/2 - MrPEX PEX-AL-PEX Tubing	Orange coil of 250 ft.	Coil
1320030	1/2 - MrPEX PEX-AL-PEX Tubing	Orange coil of 300 ft.	Coil
1320100	1/2 - MrPEX PEX-AL-PEX Tubing	Orange coil of 1000 ft.	Coil
1321080	1/2 - MrPEX PEX-AL-PEX Tubing	Orange sticks of 20 ft.	Tube of 40
1322030	1/2 - MrPEX PEX-AL-PEX Tubing	Orange coil of 100 ft.	Box of 3
1330040	5/8 - MrPEX PEX-AL-PEX Tubing	Orange coil of 400 ft.	Coil
1330050	5/8 - MrPEX PEX-AL-PEX Tubing	Orange coil of 500 ft.	Coil
1340030	3/4 - MrPEX PEX-AL-PEX Tubing	Orange coil of 300 ft.	Coil
1340050	3/4 - MrPEX PEX-AL-PEX Tubing	Orange coil of 500 ft.	Coil
1341032	3/4 - MrPEX PEX-AL-PEX Tubing	Orange sticks of 20 ft.	Tube of 16
1342020	3/4 - MrPEX PEX-AL-PEX Tubing	Orange coil of 100 ft.	Box of 2
1350010	1 - MrPEX PEX-AL-PEX Tubing	Orange coil of 100 ft.	Coil
1350030	1 - MrPEX PEX-AL-PEX Tubing	Orange coil of 300 ft.	Coil
1350050	1 - MrPEX PEX-AL-PEX Tubing	Orange coil of 500 ft.	Coil
1351020	1 - MrPEX PEX-AL-PEX Tubing	Orange sticks of 20 ft.	Tube of 10