


Product Data Sheet



MrPEX® Visual Inline Flowmeter

With balancing/isolation valve, 2 – 8 gpm.

This visual inline flowmeter has a range of 2 – 8 gpm, and is sold as an alternate branch valve for the MrPEX 1 ½" Stainless Steel Manifold when visual balancing is required. The connection to the manifold branch features a G1" flat gasket connection, and an EK25 connection on the inlet side allows the 4320625 - 5/8" PEX x EK25 or 4320750 - 3/4" PEX x EK25 Compression fittings to be connected. The built-in balancing valve also offers full shut off capability.

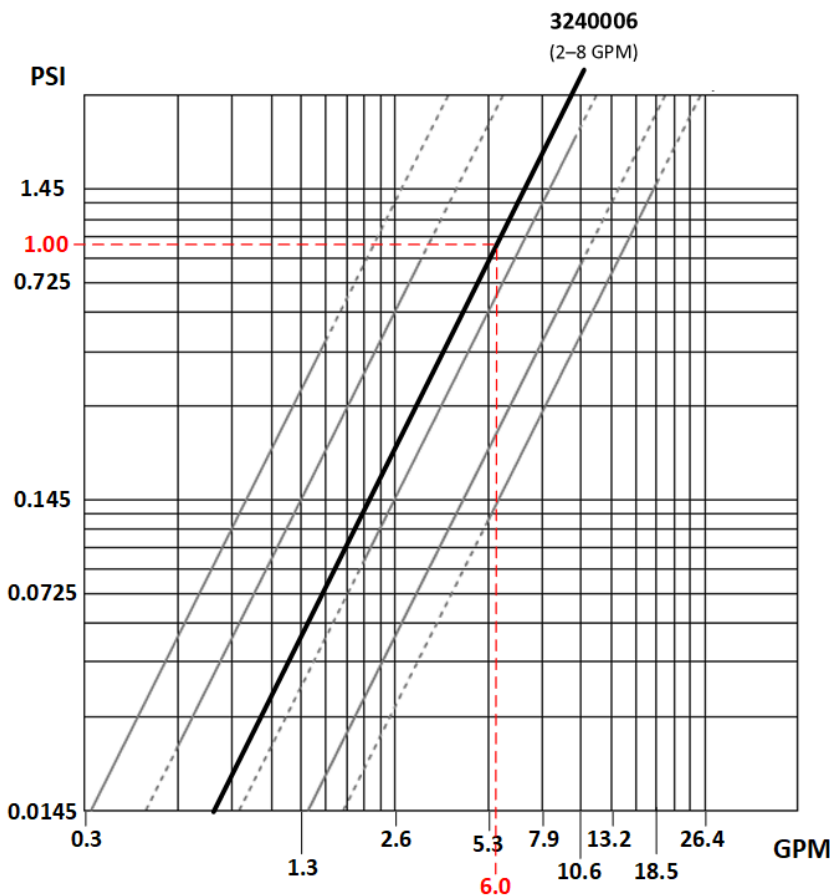

Technical Info

Max Operating Temp. & Pressure:	- 145psi @ 248° F
Cv Value:	6.0 GPM
Flowmeter Range:	2.0 - 8.0 GPM
Max Hydro Test:	145 psi (24hr)
Max Air Test:	100 psi (24hr)

Part#	Description	Type	Unit
3240006	Visual Flowmeter with Balancing/Isolation Valve, 2 – 8 GPM	G1" x EK25	Each