

# MrPEX® 326 MANIFOLD SUBMITTAL




5300 Alpine Drive NW, Suite 210  
 Ramsey, MN 55303  
 support@mrpexsystems.com

Project Name \_\_\_\_\_ Date \_\_\_\_\_  
 Submitted By \_\_\_\_\_ Phone \_\_\_\_\_  
 Project Location \_\_\_\_\_ MrPEX® Rep. \_\_\_\_\_  
 Engineer \_\_\_\_\_ Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_ P.O. Number \_\_\_\_\_


## MrPEX® 1 1/2" STAINLESS STEEL FOR 5/8" AND 3/4" PEX AND PEX-AL-PEX TUBING, 3-13 LOOPS

MrPEX® 1 1/2" Stainless Steel Manifolds are made from high-quality Type 304 stainless steel and comes fully assembled in 3–13 loop configurations. The manifold body supply and return inlet comes with 1 1/2" NPT flat gasket union to aid in installation. End cap, vent, drain/purge valve come factory mounted on the body. The branches come with G 1" x EK 25 flat gasket on/off valves on the supply, and G 1" x EK 25 flat gasket inline visual flowmeter with built-in balancing valves on the return. Use any of the MrPEX® EK 25 fitting assemblies (PEX to EK 25 or PEX-AL-PEX to EK 25) to connect tubing to the manifold.

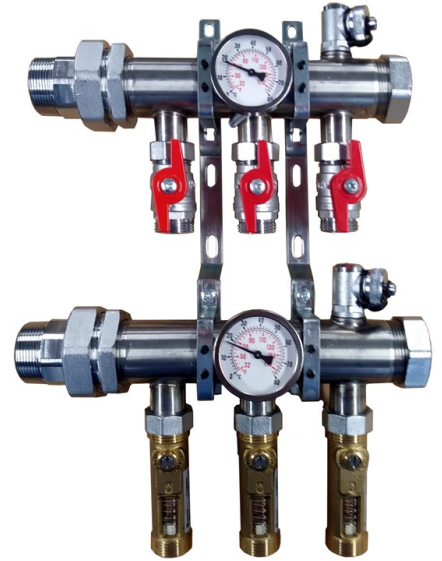

### Technical Data

Material	Stainless Steel AISI 304L
Operating Pressure	87 psi
Max Pressure @70°F	145 psi
Maximum working temperature	212°F
Max differential pressure	14.5 psi
Flowmeter Range	2 to 8 GPM
Supply Valve (wide open)	35 CV
Return Flowmeter (wide open)	5.78 CV
Accepted media	Water, up to 50% propylene glycol
Loop Connection	EK25 (G1" Eurocone)
Available sizes	3-13 loops

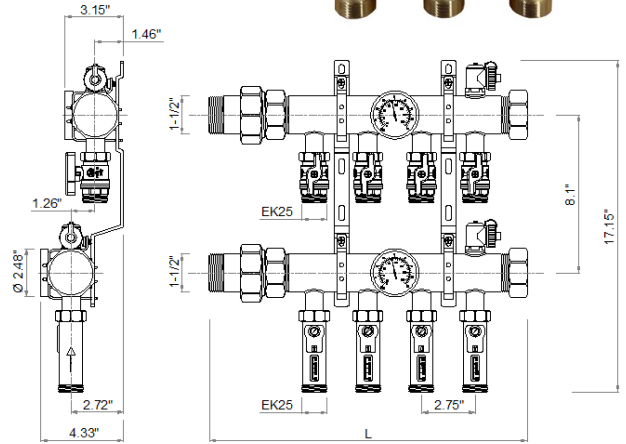

### Manifold Dimensions

Loops	3	4	5	6	7	8	9	10	11	12	13
Quantity											
Part#	3260300	3260400	3260500	3260600	3260700	3260800	3260900	3261000	3261100	3261200	3261300
Length "L"	11.80"	14.55"	17.30"	20.05"	22.80"	25.55"	28.30"	31.05"	33.80"	36.55"	39.30"