

MrPEX® 328 MANIFOLD SUBMITTAL




8252 147th Lane NW, Suite 100
 Ramsey, MN 55303
 support@mrpexsystems.com

Project Name _____ Date _____
 Submitted By _____ Phone _____
 Project Location _____ MrPEX® Rep. _____
 Engineer _____ Contractor _____
 Approval _____ P.O. Number _____


MrPEX® 1 1/2" STAINLESS STEEL FOR 5/8" AND 3/4" PEX AND PEX-AL-PEX TUBING, 3-13 LOOPS

MrPEX® 1 1/2" High Flow Stainless Steel Manifold is made from high quality stainless steel, and is offered in 2 through 12 loop configurations. The manifold comes mounted on brackets and it is equipped with full port ball valves with thermometers, manual air vents and fill/drain valves. The CV value is 5.35 per branch. Branch connections are EK 25

The SUPPLY manifold loop connections come with a balancing Lockshield x EK 25 allowing isolation of each loop. The Return manifold loop connections come with a G 1" flat gasket x EK 25 inline visual balancing flowmeters with a range from 0 to 4 GPM allowing flow adjustment of each individual loop.

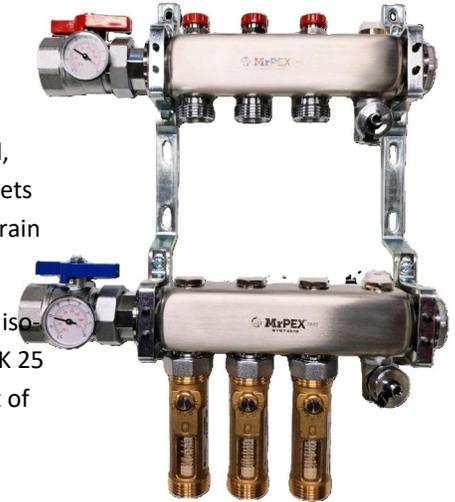

Technical Data	
Material	Stainless Steel AISI 304L
Operating Pressure	87 psi
Max Pressure @70°F	145 psi
Maximum working temperature	230°F
Max differential pressure	14.5 psi
Flowmeter Range	0 to 4 GPM
Supply Lockshields (wide open)	5.8 CV
Return Flowmeter (wide open)	5.78 CV
Accepted media	Water, up to 50% propylene glycol
Loop Connection	EK25 (G1" Eurocone)
Available sizes	2-12 loops

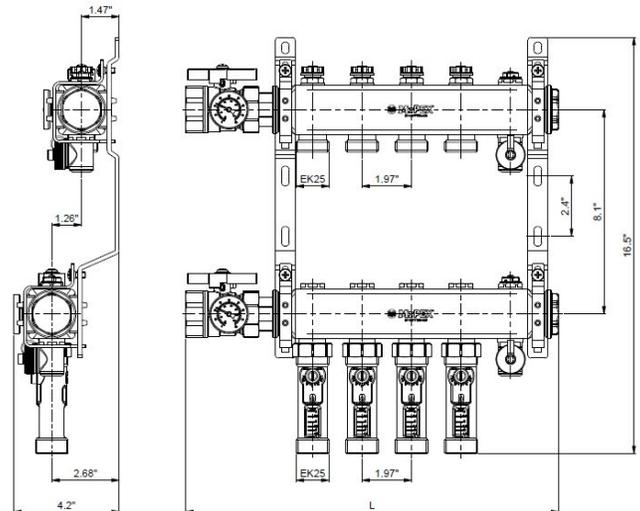

Manifold Dimensions

Loops	2	3	4	5	6	7	8	9	10	11	12
Quantity											
Part#	3280200	3280300	3280400	3280500	3280600	3280700	3280800	3280900	3281000	3281100	3281200
Length "L"	11.00"	13.00"	15.00"	16.9"	18.9"	20.8"	22.8"	24.8"	26.7"	28.7"	30.7"