

Part# 5130704

Simple 4 Zone Controller, 24VAC


The Simple Zone Controller is designed for use with 2 or 3 wire MrPEX® thermostats to control up to 4 zones, with up to 3 MrPEX® Thermal Actuators or Zone Valves connected to each zone terminal. Each zone controls the associated actuator output terminal. Actuator terminals can use jumpers to extend the number of actuators per zone. Controller comes with a factory installed internal fuse for protection. The end switch circuit from the actuators output terminals is ganged through the controller for easy wiring. 24V power from an external transformer of adequate VA is required.

Features:

- Low cost zoning solution
- External Indicator Lights
- Simplified Wiring
- Works with Actuators or Zone Valves
- Up to 3 valves per zone
- Compact Design
- Fuse Protected
- Isolated End Switch
- 2 or 3 wire Thermostat Compatibility
- Sturdy Screw Connections
- 2 Year Warranty



Top View

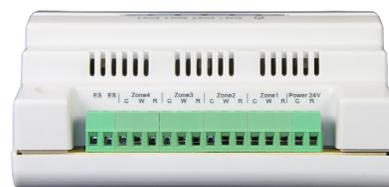

Bottom View



Specifications:

| | |
|---------------------------------|---|
| Part Number: | 5130704 |
| Zones: | 4 |
| Actuators per Zone: | Up to 3, 6 VA, (Max 12 total, 24 VA) |
| Actuator Terminal Max Draw: | 1A, 24Vac |
| Thermostat Terminal Max Draw: | 40 mA, 24Vac |
| Recommended 24 VAC Transformer: | 40 VA |
| Internal Fuse: | 5A |
| Dimensions of Enclosure: | W 5.0", H 4.2", D 2.4" |

Ordering Data

| Part # | Description | Type | Unit |
|---------|-----------------------------|---------------|------|
| 5130704 | Simple Zone Controller, 24V | Up To 4 Zones | Each |

Simple 4 Zone Controller, 24VAC

