## **Smart Relay**



**Data Sheet** 


Radiant Heating & Cooling / Plumbing / Snowmelt / Controls

A cost effective low voltage switching relay that is able to connect to MrPEX Systems wireless controls.

- Simple user interface with a tactical switch and a multicolored LED
- Volt free contact can be used for powered switching or as a dry contact
- Two sets of power terminals eliminating messy wiring
- Easy installation using wall mounting encloser (included)
- Functions as a Zigbee repeater to expand network coverage



Description and Features	Specifications
Compatible with MrPEX Systems/Salus Smart Home Automation	Controls/Indicators: Multifunction Button. Multicolor LED
Up to 3 Amp Resistive Load Capacity	<b>Terminals:</b> Power in (R,R,C,C), 18-30 VAC 50/60Hz, 30 mA
18 - 30 VAC Input Voltage Range	Contacts: Common (COM)/Normally Open (OUT) - 30 VAC
Configure to Operate on a Schedule or Status of Other Devices	Zigbee Based Protocol: 802.15.4 (2.54 GHz)
Configurable to Recover After Power Cycle and Communication Loss	Controls/Indicators: Multifunction Button. Multicolor LED
Operating in 32° to 113°F (0° to 45°C)	<b>Dimensions:</b> Wall cover 3.3"x 3.3"x 1.1", Relay 1.8"x 1.8"x 0.8"
Will Accept 12-24 AWG Gauge Wire	Compliance: FCC, Industry Canada, CE: RoHS
Warranty: 5 years	Compatible with: 5310010 & 5310888

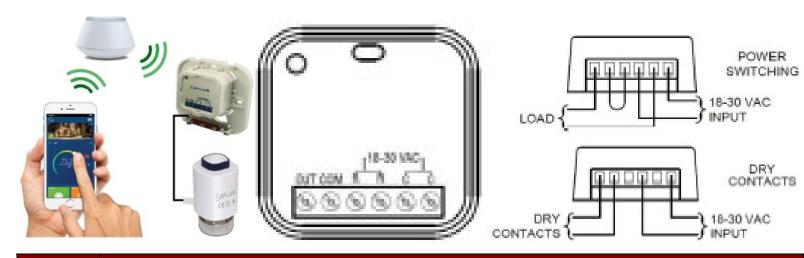

Part #	Description
5310824	Wireless Smart Relay