


Simple 4 Zone Controller, 24VAC

Radiant Heating & Cooling / Plumbing / Snowmelt / Controls

The Simple Zone Controller is designed for use with 2 or 3 wire MrPEX® thermostats to control up to 4 zones, with MrPEX® Thermal Actuators or Zone Valves connected to each zone terminal. Each zone controls the associated actuator output terminal. Actuator terminals can use jumpers to extend the number of actuators per zone. Controller comes with a factory installed internal fuse for protection. The end switch circuit from the actuators output terminals is ganged through the controller. 24V power from an external transformer of adequate VA is required.



Top View

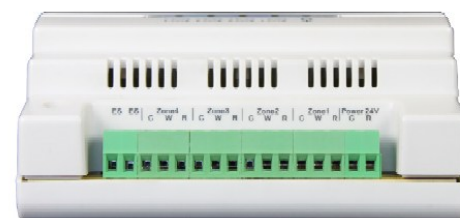

Bottom View

Features:

- Low cost zoning solution
- External Indicator Lights
- Works with Actuators or Zone Valves
- Fuse Protected
- Isolated End Switch
- 2 or 3 wire Thermostat Compatibility
- 2 or 4 wire Actuator Compatibility
- 2 Year Warranty

Specifications:

Part Number:	5130704
Zones:	4
Actuators per Zone:	6 VA max.
Actuator Terminal Max Draw:	24Vac
Thermostat Terminal Max Draw:	40 mA, 24Vac
Recommended 24 VAC Transformer:	40 VA
Internal Fuse:	5A
Dimensions of Enclosure:	W 5.0", H 4.2", D 2.4"

Simple 4 Zone Controller, 24VAC

Common Wiring Diagram

